

### 户外用互感器

6-35kV

户外 单相 环氧树脂浇注式

OUTDOORS SINGLE-PHASE EPOXY RESIN CASTING TYPE

#### 技术参数 Technical data

○ 产品性能符合标准：GB/T20840.1、2 和 IEC61869-1、2

The current transformers are in accordance with GB/T20840.1、2 and IEC61869-1、2 standards

○ 额定绝缘水平：40.5/95/185kV

○ 额定二次电流：5A 或 1A

Rated insulation level 12/42/75kV

Rated secondary current 5A or 1A

○ 额定频率：50Hz 或 60Hz

○ 环境温度：-25℃ ~+40℃

Rated frequency 50Hz or 60Hz

Ambient temperature -25℃ ~+40℃


○ 污秽等级：II 级

Pollution class: class II



额定一次电流 (A) Rated primary current	额定短时热电流 (kA) Short-time thermal current(kA/S)	额定动稳定电流 (kA) Rated dynamic current(kA)	准确级组合 Accuracy classes combination	额定二次输出 (VA) Rated secondary output			表面爬电距离 (mm) Surface creepage distance	重量 (kg) Weight
				0.2(S)	0.5	10P10		
10-100	$150 I_n \times 10^{-3}$	$375 I_n \times 10^{-3}$	0.2S 0.2 0.5 10P10 0.2S/0.2S 0.2S/0.5	15	15	15	1200	40
150-200	25	62.5						
300-400	31.5	80						
500-600	63	130			30	20		
800-1000	80	160						
1200-2000	100	160						

#### 外形及安装尺寸 Overall dimension drawing

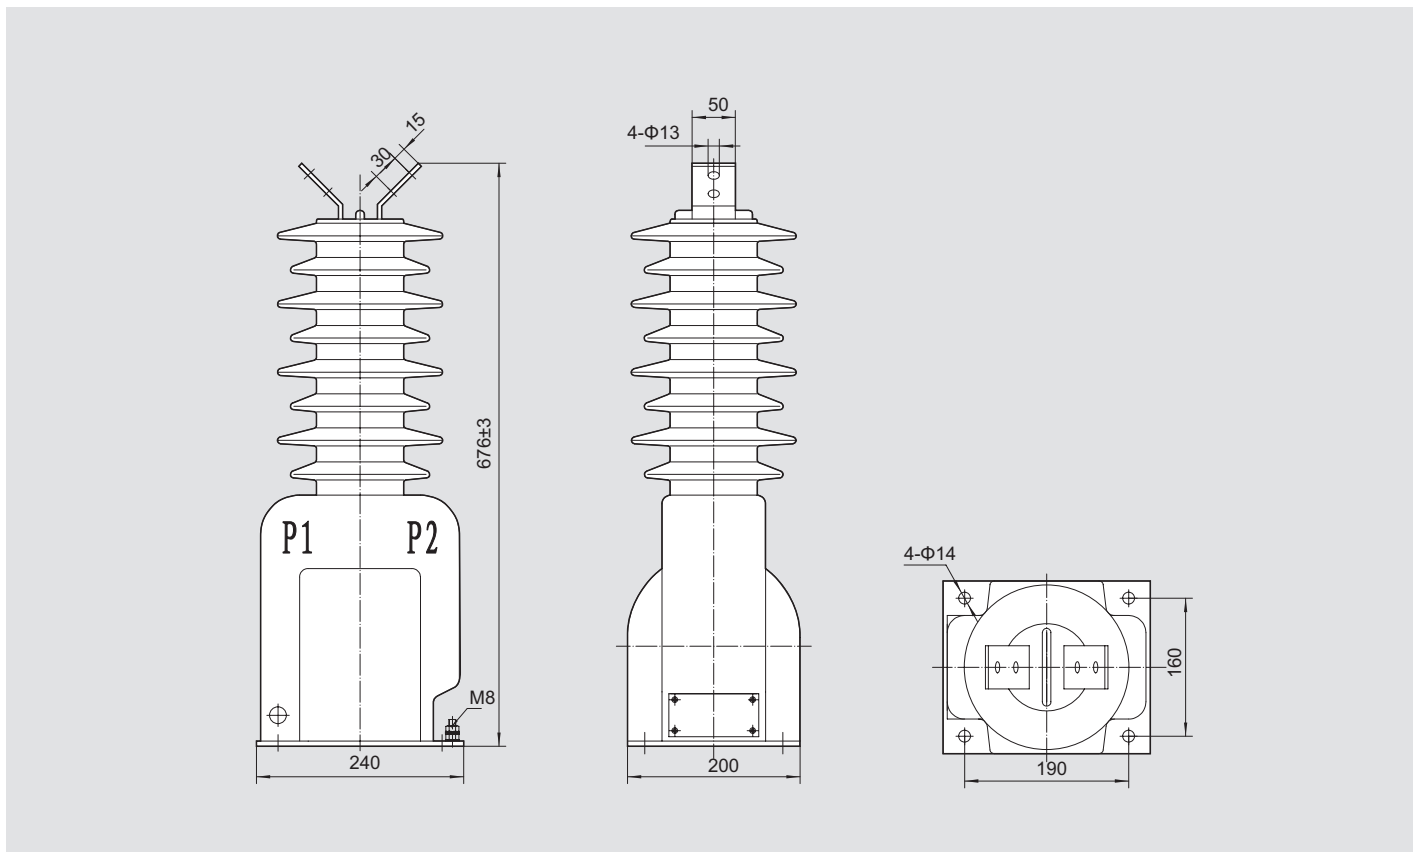

户外互感器