

FDGE7 型半封闭干式放电线圈

GFDGE8—SEMI—ENCLOSED DRY DISCHARGE COIL

OBC®

户内 单相 环氧树脂浇注式
 INTDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE

技术参数 Technical data

○产品性能符合标准：DL/T 653-2009《电压并联电容器用放电线圈订货技术条件》
 The voltage transformers are in accordance DL/T653-2009《Specification of discharge coils for high voltage parallel connection capacitor for order standards》;

○额定频率：50Hz 或 60Hz
 Rated frequency 50Hz or 60Hz

○负荷功率因数：COS=Φ0.8(滞后)
 Load power factor: COS=Φ0.8(lagging)


○污秽等级：IV 级
 Pollution class: IV

○其他技术参数见下表
 Other technical data see following table:



型号 Type	额定电压比 (kV) Rated voltage Ratio	额定二次输出 (VA) Rated secondary output				放电容量 Discharge capacity	额定绝缘水平 (kV) Rated Insulating level(kV)
		0.2	0.5	1	6P		
FDGE8/6.6/√3-1.7-1	6.6/√3/0.1/√3/0.1/3	15	30	60	50	1.7	7.2/32/60
FDGE8/7.2/√3-1.7-1	7.2/√3/0.1/√3/0.1/3						
FDGE8/11/√3-1.7-1	11/√3/0.1/√3/0.1/3					1.7	12/42/75
FDGE8/11/√3-2.5-1						2.5	
FDGE8/11/√3-3.4-1						3.4	
FDGE8/12/√3-1.7-1	12/√3/0.1/√3/0.1/3					1.7	
FDGE8/12/√3-2.5-1		2.5					
FDGE8/12/√3-3.4-1		3.4					

外形及安装尺寸 Overall dimension drawing

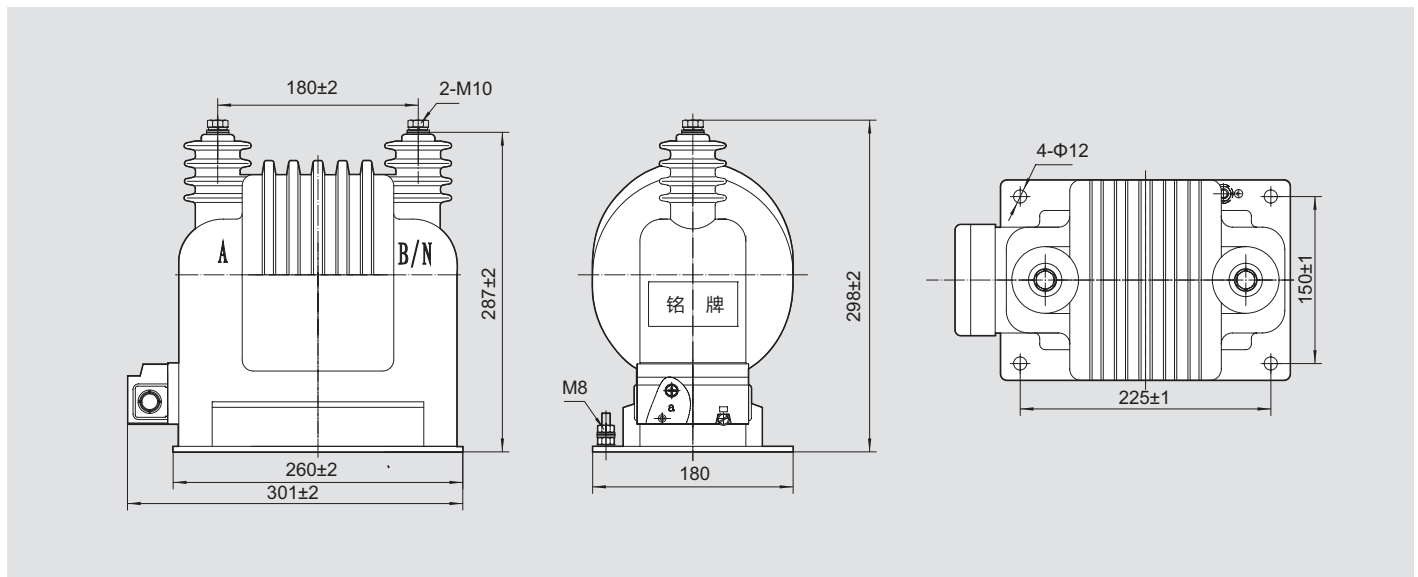

接线原理图

